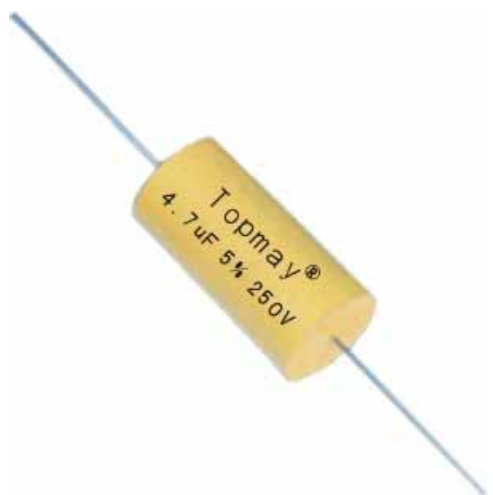


Widely used in high frequency, DC, AC and pulse circuits.

◆ Features

1. Non-inductive construction, wound with metallized polypropylene film as dielectric, copper-clad steel leads and outer wrapping of polyester sealed with epoxy resin;
2. Very low loss at high frequency, suitable for high current;
3. High insulation resistance, long life due to self-healing effect.

◆ General Specifications

Climatic Category	40/85/21	
Rated Voltage	160, 250, 400, 630, 1000, 1200V.	
Capacitance Range	0.01~10.0uF	
Capacitance Tolerance	± 5%(J); ± 10%(K); ± 20%(M).	
Voltage Proof	1.4U _R (5s)	
Dissipation Factor(1KHz)	0.1%	
Insulation Resistance	CR 0.33uF 25000MΩ CR > 0.33uF 7500s	