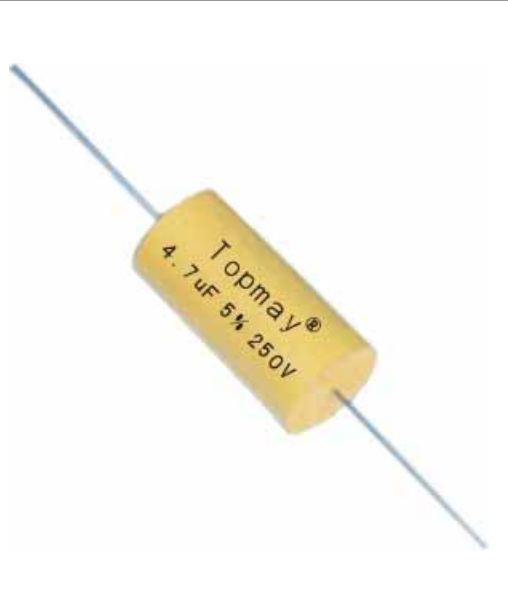


Suitable for blocking, by-pass and coupling of DC and signals to VHF range. Widely used in filter, noise suppression and low pulse circuits.

◆ Features

1. Non-inductive construction, wound with metallized polyester film as dielectric, copper-clad steel leads and outer wrapping of polyester sealed with epoxy resin;
2. Wide capacitance range, small size;
3. Long life due to self-healing effect.

◆ General Specifications

Climatic Category	40/85/21	
Rated Voltage	100, 160, 250, 400, 630V.	
Capacitance Range	0.01~20.0uF	
Capacitance Tolerance	± 5%(J); ± 10%(K); ± 20%(M).	
Voltage Proof	1.4U _R (5s)	
Dissipation Factor(1KHz)	0.1%	
Insulation Resistance	CR 0.33uF 7500MΩ CR > 0.33uF 2500s	