


Features

- 5,000 times charge and discharge by 5-35°C operation.
- Low leakage current reduces battery consumption.
- Suitable for photoflash.
- Having safety vents.

Specifications

Item	Characteristics	
Operating temperature range	-20~+55°C	
Rated voltage range	330VDC(Surge voltage 350VDC)	
Capacitance range	10-250 μF	
Capacitance tolerance (at 20°C, 120Hz)	-10%~+20%	
Leakage current(I) (at 20°C)	After 5 minute application of rated voltage. I≤1.0C μA Where C: Nominal capacitance in μF	
Dissipation factor(Tan δ) (at 20°C, 120Hz)	0.06max	
Charge and discharge characteristics (at 5~35°C)	The following specifications shall be satisfied when the capacitors are restored to 20°C after the charge and discharge are repeated 5,000 times. Discharge resistance or Xenon tube: 0.7~1.0 Ω.	
	Capacitance change	≤10% of the initial value
	tan δ	≤150% of the initial specified value
	I	≤150% of the initial specified value
Shelf life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them at 55°C for 1,000 hours without voltage applied	
	Capacitance change	≤10% of the initial value
	tan δ	≤150% of the initial specified value
	I	≤150% of the initial specified value
Others	Satisfies of EIAJ RC-3801A.	

Dimensions

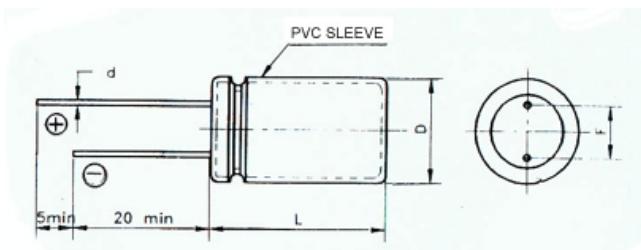

D±0.5	10	13	14.5	16	18
F±0.5	5.0		7.5		
d±0.05	0.6		0.8		

Case Size DxL(mm)

W.V.(v)\ Cap.(μF)	10	13	14.5	16	18
10	10×20				
20		13×25			
40		13×25			
60	13×25	14.5×25	16×25		
80	13×32	14.5×30	16×25		
100		14.5×30	16×25		
120		14.5×30	16×30		
140		14.5×36	16×30		
150		14.5×36	16×30		
160		14.5×38	16×36	18×30	
180			16×36	18×30	
200			16×40	18×30	
220				18×40	
250					18×40